


PONZIO PE68

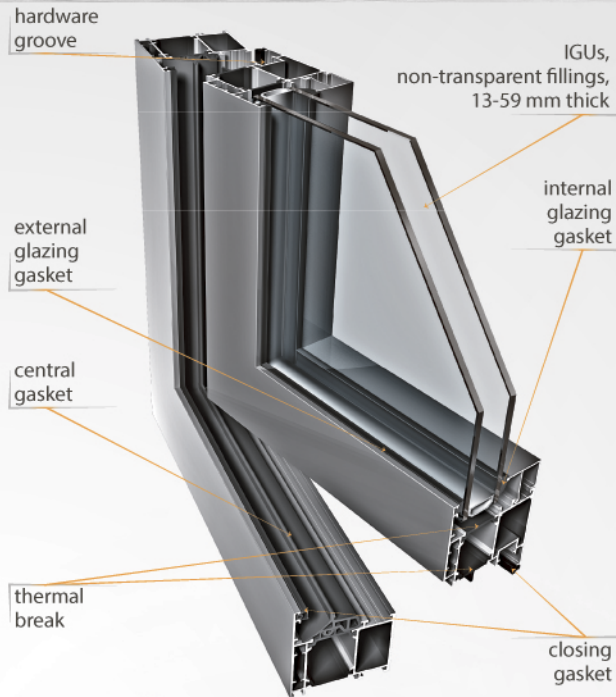


$U_w = 0.93 \text{ W/m}^2\text{K}$


*calculated for W 1480 x H 2180 mm window and $U_g = 0.5 \text{ W/m}^2\text{K}$, triple glazed unit

$U_w = 1.32 \text{ W/m}^2\text{K}$

$U_g = 1.0 \text{ W/m}^2\text{K}$, double glazed unit

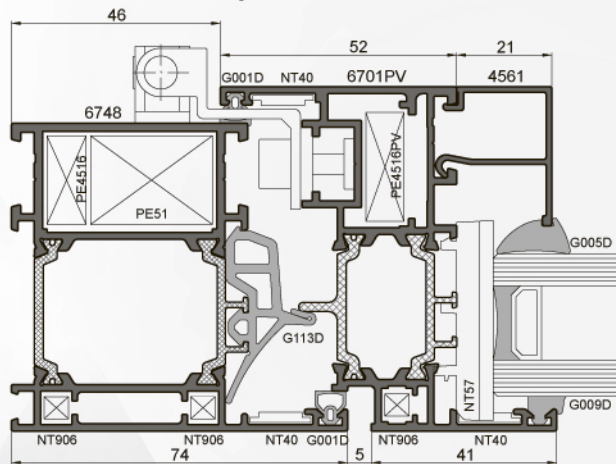


PONZIO PE68HI

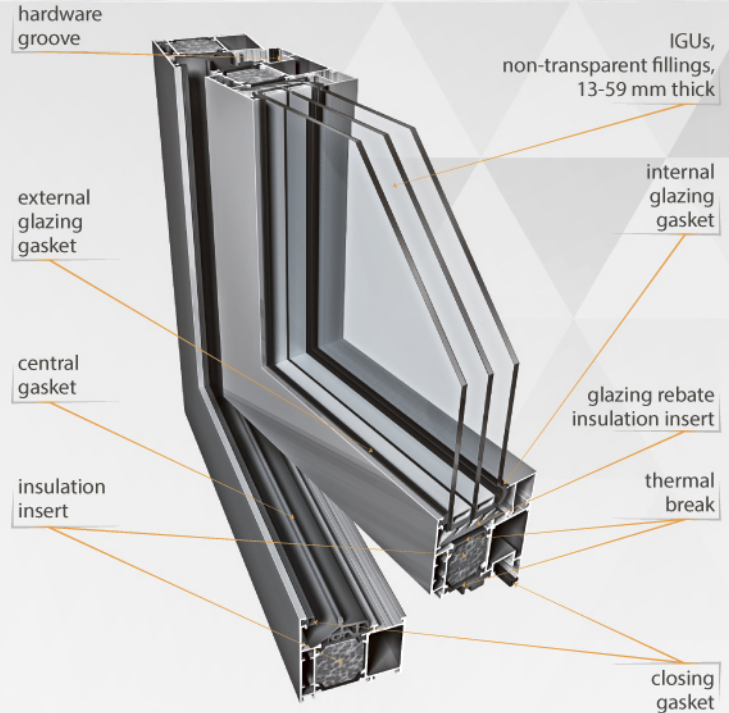


$U_w = 0.84 \text{ W/m}^2\text{K}$

*calculated for W 1480 x H 2180 mm window and $U_g = 0.5 \text{ W/m}^2\text{K}$, triple glazed unit

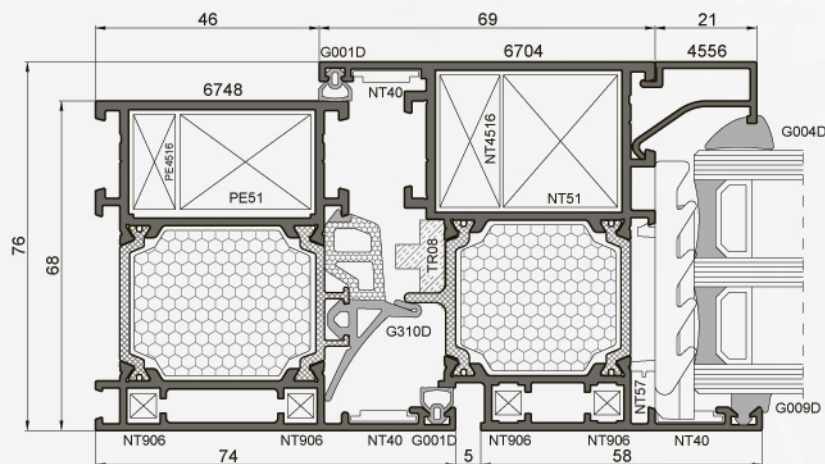

- three cavity profiles system with very good insulation properties
- profiles adjusted to a wide variety of window hardware
- window frame profile depth: 68 mm, window sash profiles depth: 76 mm
- 32 mm thermal break and one-component or two-component central gaskets provide good thermal parameters
- three cavity design provides profiles with high stiffness allowing the creation of large dimension constructions
- window sash flush with the frame on the outside
- arched constructions possible
- wide variety of corner connections
- gaskets made of EPDM synthetic rubber
- PE68+ and PE68HI system variants depending on used insulation inserts
- wide variety of window types, e.g. fixed window, turn-tilt and turn windows, outward opening windows, concealed sash windows etc.

PONZIO PE68

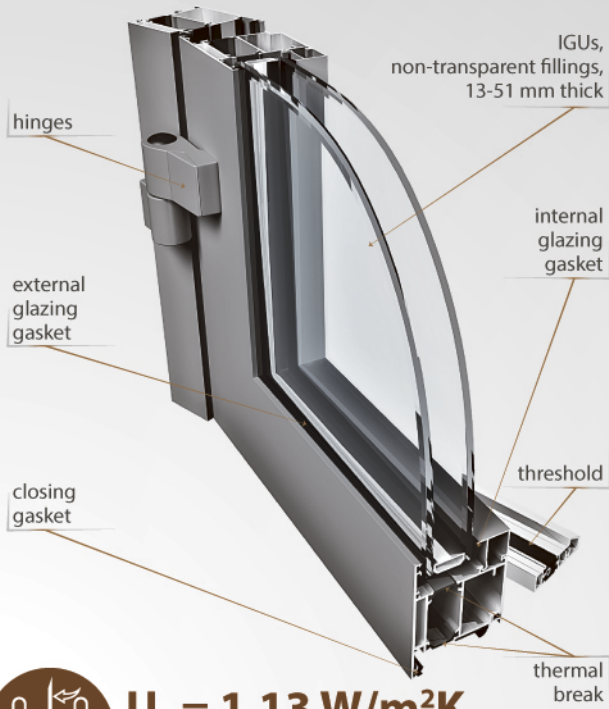


$U_d = 1.13 \text{ W/m}^2\text{K}$


*calculated for W 1230 x H 2180 mm door and $U_g = 0.5 \text{ W/m}^2\text{K}$, triple glazed unit

$U_d = 1.48 \text{ W/m}^2\text{K}$

$U_g = 1.0 \text{ W/m}^2\text{K}$, double glazed unit

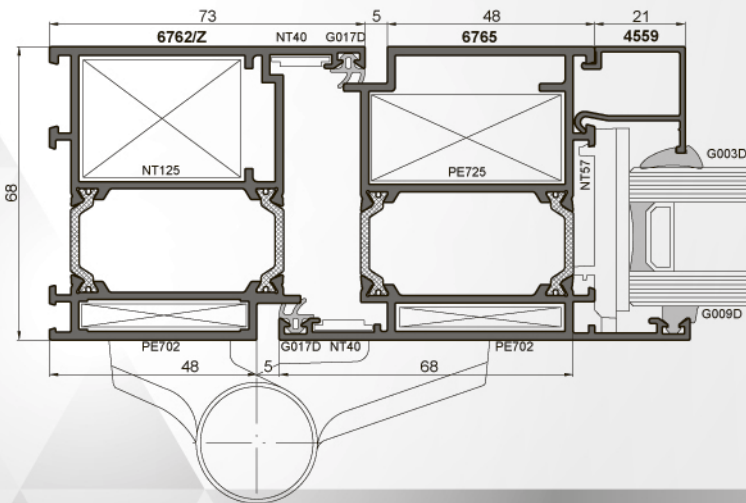


PONZIO PE68HI

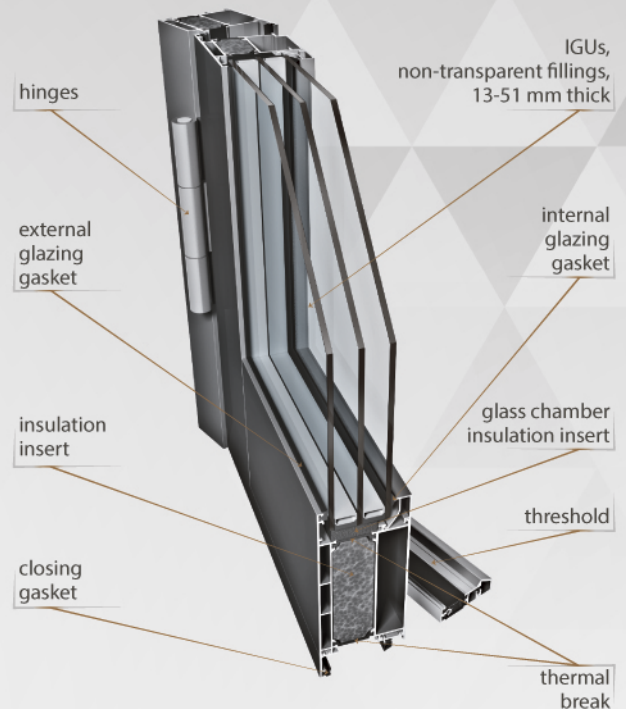

$U_d = 1.06 \text{ W/m}^2\text{K}$

*calculated for W 1230 x H 2180 mm door and $U_g = 0.5 \text{ W/m}^2\text{K}$, triple glazed unit

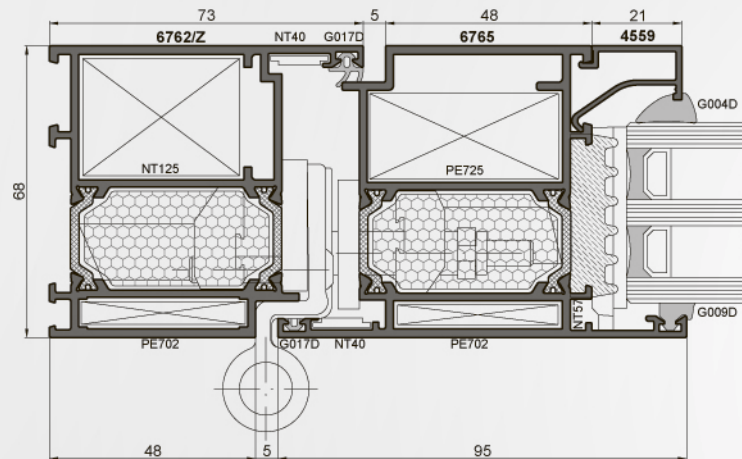

- three cavity profiles system with very good insulation properties
- coplanar doors available (18 mm groove clearance)
- same glazing beads for doors and windows
- 24 mm thermal breaks
- door frame profiles depth is 68 mm, door leaf profiles depth is 68 mm
- three cavity design provides profiles with high stiffness allowing the creation of large dimension constructions
- door leaf flush with frame
- profiles designed to enable easy connection between doors and windows
- wide variety of corner connections
- arched constructions possible
- PE68+ and PE68HI system variants depending on used insulation inserts
- wide range of hardware