

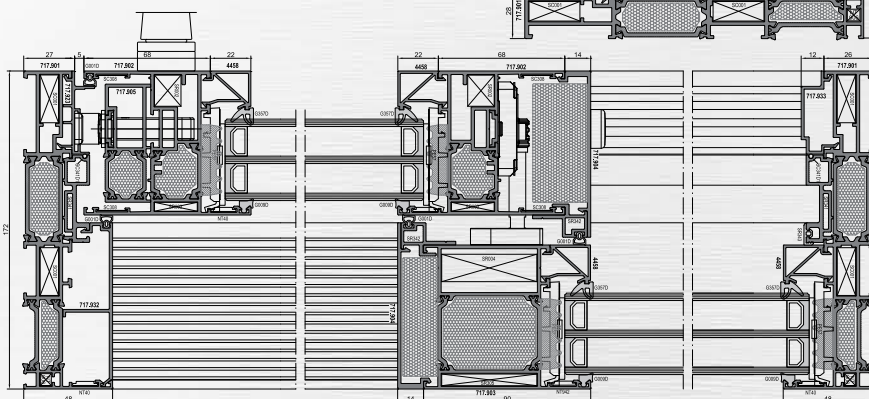
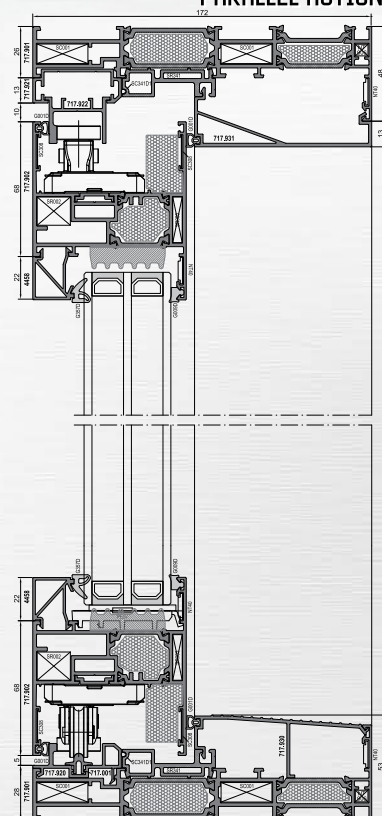


Ponzio SLI700TT PARALLEL ACTION

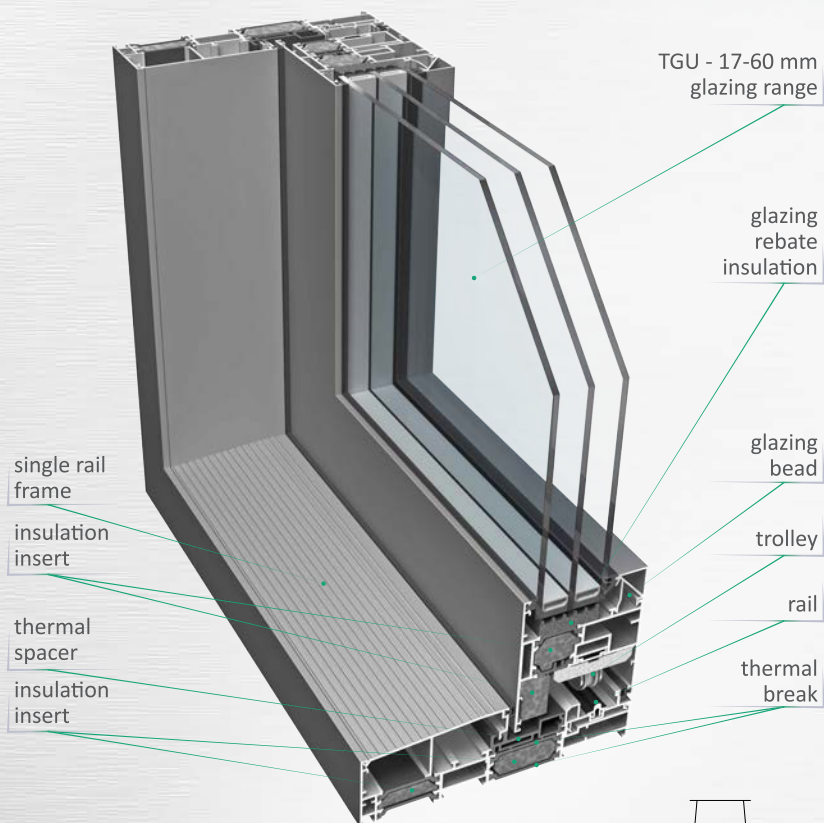

$$U_w = 0.88 \text{ W/m}^2\text{K}$$

*reference construction dimensions:
L 2400 x H 2400 mm, $U_g = 0.5 \text{ W/m}^2\text{K}$,
triple glazing

Technical parameters

Filling thickness	» 17 - 60 mm
Sash depth	» 78 mm
Frame depth	» 172 mm for single rail
Maximum sash dimensions	» L 2000 x H 2500 mm
Maximum sash weight	» 200 kg
Air permeability	» class 4
Watertightness	» class 9A
Resistance to wind load	» class C4/B4
Thermal insulation	» U_f from 1.5 W/m ² K » U_w from 0.88 W/m ² K
Certification	» type testing in acc. with EN 14351-1 + A1

A sliding system with insulated profiles designed for the construction of external joinery.

- » closing similar to window systems - high resistance to weather conditions
- » no friction between sashes due to 8 mm opening gap
- » profile depth: 78 mm for sashes, 172 mm for frames
- » "A" (one sliding sash, fixed glazing in frame) and "C" (two sliding sashes, fixed glazing in frame) variants available

"C" variant

