




Ponzio SL1800TT

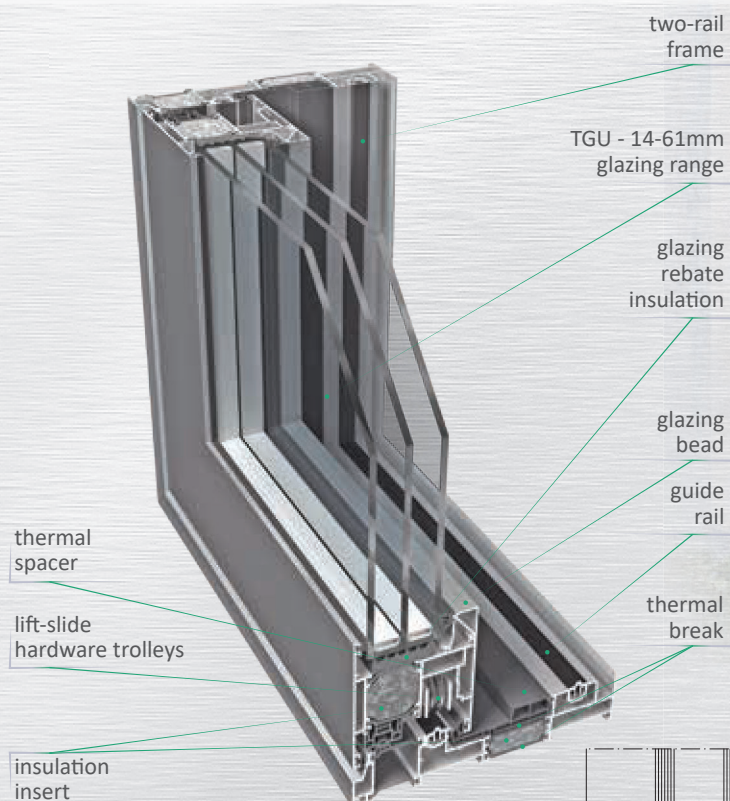

$$U_w = 0.9 \text{ W/m}^2\text{K}$$

*reference construction dimensions:
L 2400 x H 2400 mm, $U_g = 0.5 \text{ W/m}^2\text{K}$,
triple glazing

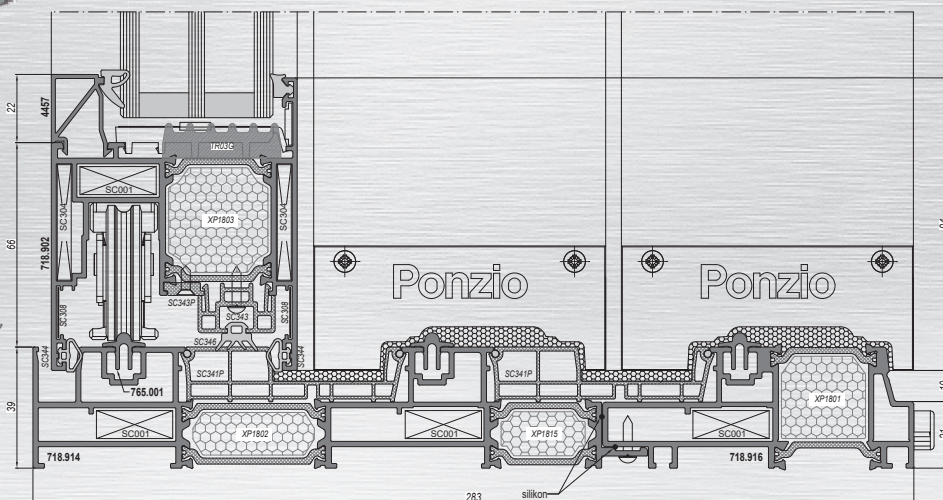

Technical parameters

Filling thickness	14 - 61 mm
Sash depth	79 mm
Frame depth	184/178 mm - two-rail frame 283/277 mm - three-rail frame
Filling type	TGU
Maximum sash dimensions	L 3300 x H 3000 mm or L 2300 x H 3500 mm
Maximum sash weight	400 kg
Air permeability	class 4
Watertightness	class E900
Thermal insulation	U_f from 1.3 W/m ² K U_w from 0.9 W/m ² K (for $U_o = 0.5$ W/m ² K)

Thermally insulated lift-slide system.

- » wider thermal breaks, deeper sashes and a glazing range up to 61 mm resulting in improved thermal parameters $U_w < 0.9 \text{ W/m}^2\text{K}$
- » thermal variants: SL1800TT, SL1800TT+, SL1800TT HI, SL1800TT SHI
- » large sash dimensions
- » large dimension structures, up to 6 sashes
- » very good weathertightness